


### Options



# HCR SERIES


## Computerized Embroidery Machine

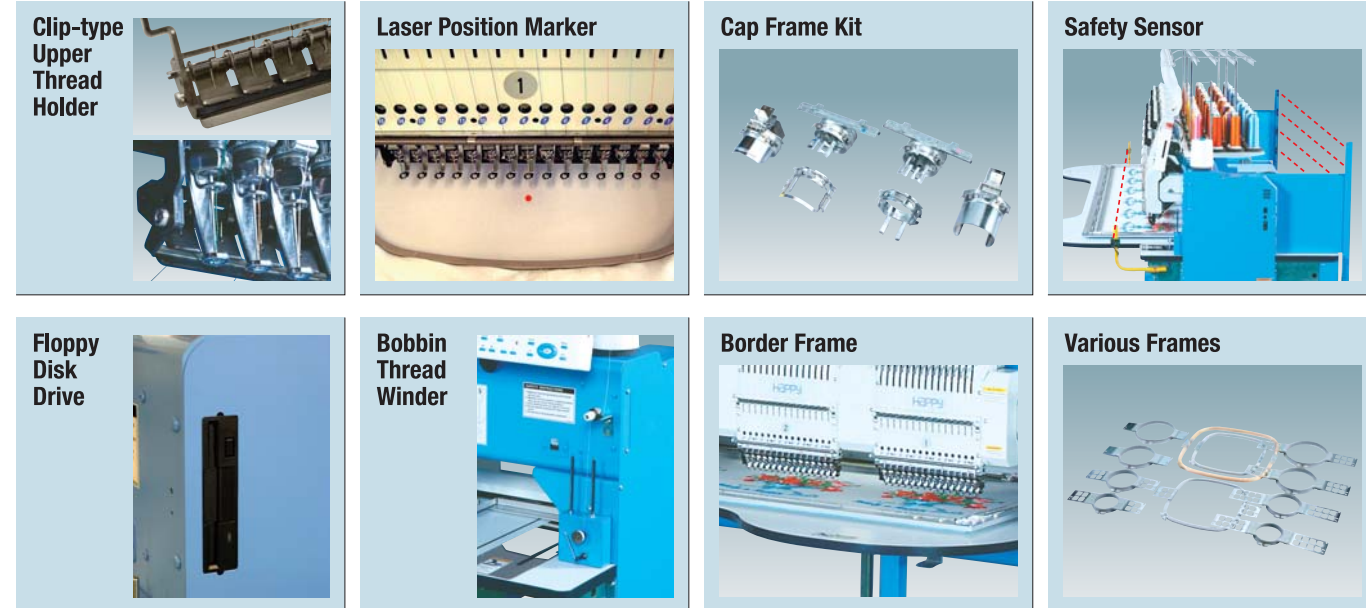

### HCR Series Specifications

Model	Head	Needles	Needle Distance (mm)	Embroidery Area per Head (DxW : mm)				Maximum Speed (r.p.m.)	
				Normal	Tubular Frame	Wide Cap Frame	Low-profile Cap Frame	Normal Tubular	Cap
HCR-1502	2	15	500	450x500	440x420	80x350	70x180	1,100	850
HCR-1504	4		360	450x360	320x320			1,000	
HCR-X1504	4		500	450x500	440x420				750
HCR-1506	6		360	450x360	320x320				
HCR-X1506	6		500	450x500	440x420				
HCR-1508	8		360	450x360	320x320				

Model	Stitch Length (mm)	Memory	Power Supply	Power Consumption	Frequency	Weight (kg) Net/Gross	Dimensions (mm)				
							L	D1	D2	H1	H2
HCR-1502	0.1~12.7	2,000,000 stitches 250 patterns	Single Phase 200~240V	0.7kw	50/60Hz	610/800	1,890	800	1,285	1,340	1,580
HCR-1504				0.8kw		640/830	2,280				
HCR-X1504				1.0kw		890/1,140	3,000				
HCR-1506				1.0kw		930/1,200	3,980				
HCR-X1506				1.2kw		960/1,300					
HCR-1508				1.2kw		1,030/1,350					

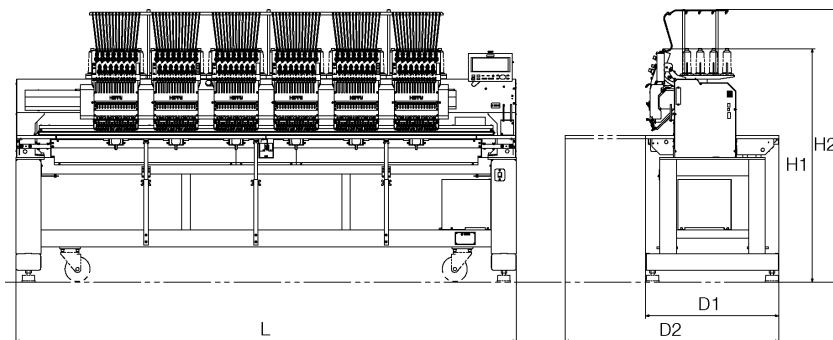

•Effective embroidery area and maximum speed may vary depending on frame type and size set on machine, design and setting of machine.  
•The specification may be changed without previous notice.

Manufactured by:

HAPPY Industrial Corporation

Tokyo Office: 9-5, Taito 2-chome, Taito-ku, Tokyo, JAPAN

TEL: 03-3834-0711 / FAX: 03-3835-8917

URL: <http://www.happy-ind.co.jp>

E-Mail: [emb-info@happy-ind.co.jp](mailto:emb-info@happy-ind.co.jp)

Distributed by:

MODEL: HCR-1506-45